

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97) (modified)  
Approved for use through 09/30/00. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 325772015900

Total Pages 47

First Named Inventor or Application Identifier

Junji NISHIGAKI

TITLE

IMAGE PROCESSING APPARATUS

**CERTIFICATE OF HAND DELIVERY**

Date of Delivery: March 16, 2000

I hereby certify that this paper or fee is being hand-carried to: Assistant Commissioner for Patents, Washington, D.C. 20231 on the date indicated above.

Jinrong Li

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 35]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 10]
4. ☐ Oath or Declaration [Total Pages ]
  - a. ☐ Newly executed (original)
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
  - i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting inventor(s) named in  
the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
5. ☒ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4b, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired
15. ☒ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No:

**18. CORRESPONDENCE ADDRESS**

Barry E. Bretschneider  
Registration No. 28,055

Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888  
Telephone: (202) 887-1545  
Facsimile: (202) 887-0763

- ☒ If a paper is untimely filed in the above-referenced application by applicant or his/her representative, the Assistant Commissioner is hereby petitioned under 37 CFR § 1.136(a) for the minimum extension of time required to make said paper timely. In the event a petition for extension of time is made under the provisions of this paragraph, the Assistant Commissioner is hereby requested to charge any fee required under 37 CFR § 1.17(a)-(d) to **Deposit Account No. 03-1952**. However, the Assistant Commissioner is **NOT** authorized to charge the cost of the issue fee to the Deposit Account.

The filing fee has been calculated as follows:

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	15 - 20 =	12	x \$18.00	\$0.00
INDEPENDENT CLAIMS	3 - 3 =	0	0x \$78.00	\$0.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$0.00
			BASIC FEE	\$690.00
TOTAL OF ABOVE CALCULATIONS =				\$690.00
Reduction by 1/2 for filing by small entity (Note 37 C.F.R. §§ 1.9, 1.27, 1.28). If applicable, verified statement must be attached.				\$0.00
Assignment Recording Fee (if enclosed)				\$0.00
			TOTAL =	\$690.00


- ☒ **UNDER 37 CFR 1.53(D), NO FILING FEE IS BEING PAID AT THIS TIME.**

Applicant(s) hereby petitions for any required relief including extensions of time and authorizes the Assistant Commissioner to charge the cost of such petitions and/or other fees or to credit any overpayment to **Deposit Account No. 03-1952** referencing docket no. 325772015900. A duplicate copy of this transmittal is enclosed, for that purpose.

Dated: March 16, 2000

Respectfully submitted,

By:



Barry E. Bretschneider  
Registration No. 28,055

Morrison & Foerster LLP  
2000 Pennsylvania Avenue, N.W.  
Washington, D.C. 20006-1888  
Telephone: (202) 887-1545  
Facsimile: (202) 887-0763

# IMAGE PROCESSING APPARATUS

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application is based on Patent Application  
No. HEI 11-69592 filed in Japan, the content of which is  
5 hereby incorporated by reference.

## BACKGROUND OF THE INVENTION

### FIELD OF THE INVENTION

The present invention relates to an image  
processing apparatus for storing image data in a memory,  
10 reading stored image data from a memory, and generating  
print data (i.e., data for printing out an image on paper  
such as in a printer, copier, facsimile machine and the  
like). The present invention specifically relates to an  
apparatus for processing image data used for simultaneous  
15 parallel printing in a plurality of colors such as yellow  
(Y), magenta (M), cyan (C), and black (Bk).

### DESCRIPTION OF THE RELATED ART

In color image forming apparatuses such as  
color printers, color copiers, color facsimile machines  
20 and the like, since full color images are formed by  
overlaying images of each print color Y, M, C, and Bk,  
the image data of each print color must be output to the

printhead with optimum timing so as to not produce  
dislocation of the images of the various print colors.  
For this reason the image data of each print color are  
temporarily stored in a frame memory beforehand, so as to  
5 be controllably read out with optimum timing.

In these color image forming apparatuses, the  
processing of the image data of each print color Y, M, C,  
Bk must be accomplished via simultaneous parallel  
execution in order to be able to form the image in a  
10 short time. For this reason the image data of each print  
color are simultaneously stored in a frame memory  
beforehand, so as to allow the data to be read out in  
parallel via an optimum timing.

In the image forming apparatus, the memory for  
15 storing the image data must be used efficiently in order  
to increase the speed of image formation and/or colorize  
the image, and/or reduce cost. That is, although cost  
can be reduced by reducing memory capacity, the formation  
of a plurality of images at high speed becomes difficult  
20 due to the reduced number of images that can be stored  
simultaneously. Furthermore, when memory capacity is too  
small and the image data of the four colors Y, M, C, and  
Bk cannot be stored simultaneously, the color image  
formation speed is slowed because the images of the four  
25 colors Y, M, C, Bk cannot be formed simultaneously.

Image data compression methods are methods for storing a relatively large amount of image data in a relatively small capacity memory. Various image data compression methods are known, but from the perspective of image editing (rotation, trimming, masking and the like), there are compression methods which allow editing in a compressed state, and methods which do not allow editing in a compressed state. It is desirable to allow editing in a compressed state since typical image processing apparatuses expand the image data read out from the frame memory and output these data to a printhead, and do not have a dedicated editing process circuit in the latter part of the expansion circuit. The ability to edit or the lack thereof differs according to the target editing method.

#### SUMMARY OF THE INVENTION

An object of the present invention is to achieve high speed image formation, high speed color image formation, reduce cost, and enable image editing in a compressed state by storing a relatively large amount of image data in a relatively small memory.

The present invention is an image processing apparatus for storing image data in a memory, reading image data stored in a memory, and generating print data,

and is provided with a size designating means for designating an image size, and a memory control means for storing in memory the image data compressed by a compression method corresponding to a specified image size.

Furthermore, the present invention is an image processing apparatus for storing image data in a memory, reading image data stored in a memory, and generating print data, and is provided with a size designating means for designating an image size, a first compression means for accomplishing compression by a first compression method which allows image editing in a compressed state, a second compression means for accomplishing compression by a second compression method which does not allow image editing in a compressed state, and a memory control means for selecting a compression method according to a designated image size and storing in memory the image data compressed by the selected compression method.

In present invention, a first compression method is a fixed-length compression method, and a second compression method is a variable-length compression method, and the memory control means selects a compression method for accomplishing a second compression method after a first compression method when a designated image size is larger than a specific size of a printout

sheet, and selects only a first compression method when a designated image size is smaller than the specific size of the printout sheet.

5 An A3 size sheet can be provided as an example of the aforesaid image size because the an A3 size sheet is the maximum printout sheet size in typical copiers and printers.

10 In the present invention, the image data are image data of four colors yellow, magenta, cyan, and black, and both compression and storage to memory are executed in parallel for each color.

15 These and other objects, advantages, and features of the invention will become apparent from the following description thereof, taken in conjunction with the accompanying drawings which illustrate specific embodiments of the invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 In the following description, like parts are designated by like reference numbers throughout the several drawings.

FIGS. 1A and 1B are block diagrams showing examples of the construction of the present invention;

FIG. 2 is a block diagram of an embodiment of the image processing apparatus;

FIG. 3 is a block diagram mainly showing the encoding unit 21 of FIG. 2;

FIG. 4 is a block diagram showing the fixed-length compression unit 211 of FIG. 3;

5 FIG. 5 is a block diagram mainly illustrating the attribute discriminator 212 and the variable-length code compression unit 215 of FIG. 3;

FIG. 6 is a block diagram illustrating the fixed-length data converter 25 of FIG. 2;

10 FIG. 7 is a flow chart showing the processing sequence by the variable-length expansion unit 255 of FIG. 6;

FIG. 8 illustrates the structure of data stored at each address in the frame memory 22;

15 FIGS. 9A and 9B illustrate the readout sequence from the frame memory 22 at zero (0) degrees rotation (normal) and 90 degrees rotation;

FIG. 10 illustrates the effectiveness of compression method selection; and

20 FIG. 11 shows the system construction of an image forming apparatus having an installed image processing apparatus of the present embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

##### (1) Print Image Controller (PIC unit)



FIG. 11 is a schematic view showing the system construction of an embodiment of an image forming apparatus, and FIG. 2 is a block diagram of the print image controller (PIC unit, i.e., a processor for generating print data from image data) of the image forming apparatus of FIG. 11.

#### (1-1) System Summary

The system of FIG. 11 is an image forming apparatus of the electrophotographic type which outputs image in four colors of yellow (Y), magenta (M), cyan (C), and black (Bk) onto a transfer belt TB, and simultaneously transfers all color images onto a paper sheet, and is provided with image forming units of each color Y, M, C, Bk (i.e., photoconductive drums (PCy, PCm, PCc, PCbk), developing unit D, LED unit and the like) disposed at equidistant spacing (L mm in the example of the drawing) along the transfer belt TB.

A controller CNT is provided which includes a central processing unit (CPU) for controlling the entire apparatus, the previously mentioned PIC unit, and a CPU for controlling the drive of the transfer belt TB and the like.

A paper supply unit PU has a plurality of paper supply sections. In this image forming apparatus, the width of the paper feed path corresponds to the short

edge of an A3 size sheet. Accordingly, A3 size paper is usable only when fed in a lengthwise direction. For this reason, the paper supply unit PU has a supply section A3LEF for supplying A3 size sheets in a lengthwise direction, a supply section A4LEF for supplying A4 size sheets in a lengthwise direction, and a supply section A4SEF for supplying A4 size sheets in a horizontal direction.

As shown in FIG. 2, the processing in the PIC unit basically parallel processing of the Y, M, C, Bk image data. That is, when image data are transmitted from the scanner image processing unit 12, the image data of each color Y, M, C, Bk generated by a single scanning operation are simultaneously input to the PIC unit side via the image interface 20. On the other hand, when image data are transmitted from the printer controller 14, the image data of each color Y, M, C, Bk are simultaneously input to the PIC unit side via the image interface 20 after raster image conversion by raster image processor (RIP).

The developing timing for the toners of each color Y, M, C, Bk requires that the toner of each color Y, M, C, Bk is overlaid on the transfer belt TB without color dislocation by delaying only a time corresponding to the spacing of the image forming units because the

image forming units corresponding to each color are disposed at equidistant spacing in the direction of advancement of the transfer belt in the sequence Y, M, C, Bk. Therefore, in the system of the drawing, the image forming timing of each color Y, M, C, Bk is sequentially delay-controlled only by the time equivalent to the spacing.

Since electrostatic latent images are formed on the charged surface of each of the Y, M, C, Bk photoconductive drums by scanning via four LED heads in the system shown in the drawing, color dislocation is generated when skew distortion occurs due to shifting of the parallelism of the LED heads and the photoconductive drums (PCy, PCm, PCc, PCbk), and shifting of the print start position in the main scan direction. For this reason developing is stopped by the execution of image correction and position correction for all Y, M, C, Bk image data to prevent color dislocation.

#### (1-2) Summary of Processing by the PIC Unit

The processing by the PIC unit shown in FIG. 2 is summarized below along the data flow. Setting of the processing flow and various types of set values is accomplished by a CPU included in the controller CNT.

The image data of each color Y, M, C, Bk transmitted from the scanner image processor 12 or the

printer controller 14 are input to the encoder 21. In the encoder 21, each 4x4 pixel block of image data is subjected to fixed-length compression by the GBTC method, and attributes are subjected to variable-length compression processing as necessary.

The fixed-length compression process is described in United States Patent No. 5,987,175, and in "Block Coding of Still Pictures" published in *Transactions of the Institute of Electronics and Communications Engineers*, (1979/1, vol.J62-B No. 1, pp. 17~24).

In the fixed-length compression process, the image data of each block of 4x4 pixels are compressed into data of 48 bits. In the variable-length compression process, the 48-bit data obtained after the fixed-length compression process are converted to 2-bit, 10-bit, or 50-bit data according to attributes. The variable-length compression process is executed when the document image size is a size which does not require an editing process such as rotation or the like (i.e., the maximum size of the output sheet is A3 size). Both the fixed-length compression process and the variable-length compression process are described in detail later. Data of each color converted to 48-bit data by the fixed-length compression process, and data of each color subjected to

the variable-length compression process after conversion to 48-bit data by the fixed-length compression process are respectively output to a 16-bit data bus.

FIG. 1A shows an example of the structure of the processing in the encoder 21. When the document image size is a size that cannot be subjected to an editing process such as rotation or the like (i.e., A3), the image data are converted to 48-bit data by the fixed-length compression process, and subsequently subjected to the variable-length compression process. On the other hand, when the document image size is a size that can be subjected to an editing process such as rotation or the like (i.e., A4 or smaller), the image data are only subjected to the fixed-length compression process and output as 48-bit data per 4x4 pixel block, and stored in the frame memory 22 of the subscan delay controller 23.

Although variable-length compression is switchably performed on fixed-length compression processed data as shown in FIG. 1A, fixed-length compression processed data and variable-length compression processed data of data subjected to fixed-length compression may be switchably output as shown in FIG. 1B.

FIGS. 1A and 1B show only selection of one of two paths of either a compression method allowing editing

in a compressed state alone, or a compression method  
allowing editing in a compressed state and a compression  
method that does not allow editing in a compressed state,  
but since a structure allowing selection of a compression  
method allowing editing in a compressed state alone, or a  
compression method that does not allow editing in a  
compressed state alone is also possible, a structure  
allowing selection from among three paths also is  
possible.

In the subscan delay controller 23, the timing  
for reading data of each color Y, M, C, Bk from the frame  
memory 22 independently controls each color Y, M, C, Bk  
considering the spacing L (94.2 mm in the illustrated  
system) of the developing unit of each color. In this  
way, the position of the image of each color is corrected.  
For example, the position of the Bk image is corrected by  
setting the recording position of the farthest downstream  
image forming unit Bk as the paper standard position.  
The image position of the data of each color Y, M, C is  
corrected using the image position corrected Bk data as a  
standard.

In the subscan delay controller 23, first, the  
data readout timing from the frame memory 22 is  
controlled in accordance with the printing operation  
process. That is, the data readout timing from the frame

memory 22 is controlled in accordance with the process of the print mode operation, e.g., a duplex mode for printing on both sides of a sheet, a 2-in-1 mode for printing the images of two pages on the top half and the bottom half of one side of the same sheet, frame sequential mode for sequentially printing images on sheets, memory retention mode for repeatedly outputting an image to a plurality of sheets to print a multiple number of sheets and the like.

In the subscan delay controller 23, the readout address is controlled in accordance with the image editing mode when reading data from the frame memory 22. For example, when a mode for rotating an image is set, the image is rotated by controlling the readout address as described later.

The frame memory 22 has a capacity capable of storing data of each color Y, M, C, Bk of a standard A3 size image. That is, the frame memory 22 has a capacity sufficient for storing the data of a standard A3 size image as one frame. When this storage capacity is expanded to 4 frames, print production is improved because after printing a first frame in the duplex print mode, up to a maximum of 3 frames of image data of other documents can be stored while the first document is inverted by the inversion unit and the second frame is





process (GBTC decoding).

5 The main scan direction position adjustment  
(272) is accomplished by controlling the readout timing  
from the internal memory so as to match the standard  
position (center position) in the main scan direction  
which differs by sheet size with the center position of  
the transfer belt. Subscan direction skew correction 274  
is accomplished by controlling the readout timing from  
the internal memory so as to shift the line of a specific  
10 number of pixels as a unit determined by the degree of  
skewing. The degree of skewing is detected by measuring  
the amount of dislocation relative to the Bk component  
when a test pattern of each color Y, M, C, Bk are  
overlaid on the transfer belt. Measurement of the amount  
15 of dislocation is accomplished using sensors not shown in  
the drawing and provided downstream from the Bk image  
forming unit. The fixed-length expansion process 271 is  
the reverse conversion process of the fixed-length  
compression process. In this way image data are  
20 regenerated from the compressed Y, M, C, Bk data and  
transmitted to the gradient regenerator 29.

In the gradient regenerator 29, after a  
resolution conversion process is executed to render each  
color Y, M, C, Bk at 2400 dpi, a gamma correction process  
25 is executed to correct gradient distortion due to gamma

characteristics in the electrophotographic process, and the corrected image data of each color are respectively transmitted to the LED driver corresponding to the printhead controller 30. Before gamma correction, image edge detection is accomplished again, and in the text edge part, resolution is given priority and subjected to 1-dot cycle intensity modulation (ES process). At this time, in 2-dot cycle intensity modulation, a different screen angle is used for each color to improve image graininess (screen process).

## (2) Details of the Coding Process (Compression)

Details of the fixed-length compression process and the variable-length compression process executed as necessary after the GBTC method fixed-length compression are described below with reference to FIGS. 3~5. FIG. 3 is a block diagram mainly showing the encoder 21, FIG. 4 is a block diagram showing the fixed-length compression unit 211 of FIG. 3, and FIG. 5 is a block diagram mainly showing the attribute discriminator 212 and the variable-length compression unit 215 of FIG. 3.

### (2-1) Block Generation

In the block generator 210 shown in FIG. 3, blocks are extracted as 4x4 pixel blocks from raster data of the image of each color Y, M, C, Bk of 8-bits per pixel. Each extracted block comprises  $8 \times 4 \times 4 = 128$  bits,

and is transmitted to the fixed-length compression unit 211.

#### (2-2) Fixed-length Compression Process

In the fixed-length compression unit 211 shown in FIG. 4, the previously mentioned 128-bit data are compressed by the GBTC method and converted to 48-bit compressed data. First, the maximum value (Lmax) and the minimum value (Lmin) are calculated from the image data corresponding to the 4x4 pixel block.

Then, internal points P2 and P1 are calculated based on the calculated maximum and minimum values. The internal point P2 is an internal point at which the gradient between the maximum and minimum values is 3:1, and is an internal point derived from the maximum value Lmax as calculated by expression (1) below. The internal point P1 is an internal point at which the gradient between the maximum and minimum values is 1:3, and is an internal point derived from the maximum value Lmin as calculated by expression (2) below.

$$P2 = (Lmax \times 3 + Lmin) / 4 \quad (1)$$

$$P1 = (Lmax + Lmin \times 3) / 4 \quad (2)$$

Next, an upper limit Q4 is calculated based on the calculated internal point P2 via expression (3) below, and a lower limit Q1 is calculated based on the internal point P1 via the expression (4) below.

$$Q4=(\text{average value of image data} > P2) \quad (3)$$

$$Q1=(\text{average value of image data} < P1) \quad (4)$$

Next, the block average value index LA is calculated via expression (5) below based on the calculated upper limit Q4 and lower limit Q1, and similarly the block gradient band index LD is calculated via expression (6) below based on the upper limit Q4 and lower limit Q1.

$$LA=(Q4+Q1)/2 \quad (5)$$

$$LD=(Q4-Q1) \quad (6)$$

Then, the data value of each pixel is quantified according to the rules of expressions (7)~(10) below based on the magnitude relationship of the average value index LA, gradient band index LD, and the data value of each pixel. In this way, each pixel is allocated a 2-bit code

$$\text{Data value} > LA + LD/4 \quad \rightarrow \quad 11 \quad (7)$$

$$LA + LD/4 \geq \text{data value} > LA \quad \rightarrow \quad 10 \quad (8)$$

$$LA \geq \text{data value} > LA - LD/4 \quad \rightarrow \quad 01 \quad (9)$$

$$LA - LD/4 \geq \text{data value} \quad \rightarrow \quad 00 \quad (10)$$

By the above process the 4x4x8-bit=128-bit image data comprising the 8-bit LA and the 8-bit LD, and the 2-bit per pixel, 4x4 pixel 32-bit quantified code are compressed into 48-bit fixed-length data.

### (2-3) Variable-length compression

The fixed-length compressed data are subjected to variable-length compression when the document size is A3. The variable-length compressor 215 executes a compression process in accordance with the discrimination results of the attribute discriminator 212.

#### (2-3-1) Attribute Discrimination

As shown in FIG. 5, the attribute discriminator 212 discriminates the attributes of each 4x4 pixel block based on the average value index LA and the gradient band index LD according to the rules within the attribute discriminator 212, and generates 2-bit attribute code for each block. This operation is described in sections (a)~(d) below.

(a) The attribute information ATR is set at [00] when LD is less than a predetermined gradient band reference value LDref and LA is less than a predetermined average value first reference value LAref1, since there is scant gradient difference within the block and the density level is low (i.e., near zero).

(b) The attribute information ATR is set at [01] when LD is less than a predetermined gradient band reference value LDref and LA is greater than a predetermined average value second reference value LAref2, since there is scant gradient difference within the block and the density level is high (i.e., near 255).

(c) The attribute information ATR is set at [10] when LD is less than a predetermined gradient band reference value LDref and LA is greater than a predetermined average value first reference value LAref1 but less than a predetermined average value second reference value LAref2, since there is scant gradient difference within the block and the density level is near intermediate.

(d) The attribute information ATR is set at [11] at other times, i.e., when LA is greater than a predetermined gradient reference value LDref since the gradient difference is large within the block.

The above three reference values LDref, LAref1, and LAref2 are values set in an internal register from the CPU, and are defined below. Setting these three reference values at suitable values allows adjustment of the compression ratio of the variable-length compression in consideration of image quality and balance.

(a) The gradient band reference value LDref is used in determining the magnitude of the gradient difference.

When LDref is set at a large value, [ATR=11] decreases, the number of blocks without a gradient difference increases, and the number of blocks with a gradient difference decreases. When LSref is set at a small value, [ATR=11] increases, the number of blocks without a gradient difference decreases, and the number of blocks

with a gradient difference increases.

(b) The average value first reference LAref1 is used in determining blocks of low density level. When LAref1 is set at a large value, [ATR=00] increases. For example, when LAref1 is set at LAref1=5, [ATR=00] when the density level of all pixels within a block are less than 5.

(c) The average value second reference value LAref2 is used in determining blocks of high density level. When LAref2 is set at a small value, [ATR=01] increases. For example, when LAref2 is set at LAref2=250, [ATR=01] when the density level of all pixels within a block is less than 250.

#### (2-3-2) Variable-length Encoding

In the variable-length compressor 215, the data of each block of 4x4 pixels are converted according to rules stipulated in the lower right box of FIG. 5 in accordance with the value of the attribute information ATR input from the attribute discriminator 212.

(a) The [ATR=00] block is converted to only 2-bit attribute information [00].

(b) The [ATR=01] block is converted to only 2-bit attribute information [01].

(c) The [ATR=10] block is converted to 10-bit data comprising 2-bit attribute information [10], and 8-bit average value index LA from the attribute information

[10].

(d) The [ATR=11] block is converted to 50-bit data comprising 2-bit attribute information [11], and 48-bit fixed-length compression data from the attribute information [11].

The variable-length compressed data converted from the 48-bit fixed-length compressed data to 2-bit attribute information, 2-bit attribute information, 10-bit data comprising 2-bit attribute information and 8-bit average value index LA, or 50-bit data comprising 2-bit attribute information and 48-bit fixed-length compressed data are stored in an internal register as shown in the upper right box in FIG. 5, and thereafter serially converted suitably for a 16-bit database and output.

#### (2-3-3) When Not Variable-length Encoded

The variable-length compression process is performed only when the document image size is A3 (i.e., a size not requiring rotation since its the same size as the maximum size of the output sheet) because after variable-length compression, editing such as image rotation and the like cannot occur by address control when reading from the frame memory 22. That is, when the document size is A4 (i.e., a size that can be rotated since it is smaller than the maximum size of the output sheet), only the fixed-length compression process is



performed and the variable-length process is not performed so as to execute the rotation process as necessary when reading from the frame memory 22.

Although the compression ratio of the fixed-length compression process alone is less than the compression ratio when the fixed-length compression process and the variable-length compression process are sued together, a sufficient amount of data can be stored in the frame memory because the amount of data of an A4 size image is less than the amount of data of an A3 size image.

### (3) Memory Control

The control for switchably writing to the frame memory 22 either the data subjected to only fixed-length compression (A4 size and smaller) or data subjected to variable-length compression after fixed-length compression, and the control for rotating an image by controlling the address when reading from the frame memory 22 are described below.

#### (3-1) Memory Write Control (switch control)

The switch from subjecting 48-bits per 4x4 pixel block fixed-length compressed data to variable-length compression and writing to frame memory 22, and simply writing the 48-bits per 4x4 pixel block fixed-length compressed data to frame memory 22 without variable-length compression at selector 230 is

accomplished by the CPU in accordance with fixed-length/variable-length switch signal CODESEL set in an internal register. These controls are described below.

(a) When [CODESEL=0], fixed-length compressed data are subjected to variable-length compression and then stored in frame memory 22.

(b) When [CODESEL=1], fixed-length compressed data are not subjected to variable-length compression, and are directly written to frame memory 22.

The CODESEL is determined in accordance with the document size. That is, [CODESEL=0] when a document is A3 size. [CODESEL=1] when a document is A4 size or smaller.

Only A3 and A4 sizes are described to simplify the description of the present invention. However, optional sizes also may be set.

When a document size is smaller than A4, the fixed-length compressed data of 48-bits per 4x4 pixel block are stored in frame memory 22 via the previously described switch control. For this reason, an image can be rotated 90° via address control to switch the row address and column address when reading from the frame memory 22. That is, edit processing is possible in a compressed state. When a document is A3 size, fixed-length compressed data of 48-bits per 4x4 pixel block are

subjected to variable-length compression, then stored in frame memory 22. For this reason the amount of data can be reduced beforehand, and a relatively small capacity and inexpensive memory can be used as the frame memory 22., thereby reducing cost. For example, In the system of the present embodiment, A4 size 600 dpi image data can be stored in a frame memory 22 comprising 2 DRAM having 64 MB per color.

(3-2) Memory Readout Control (Image Rotation)

FIG. 8 illustrates data stored at each address within the frame memory 22. As shown in the drawing, each address in frame memory 22 is specified by row address and column address. The fixed-length compressed data of 48-bits per block comprise the 8-bit average value index LA, 8-bit gradient band index LD, and each 2-bit attribute data totaling 32-bits of code information P0~Pf.

FIG. 9 shows the process for rotating an image by switching the row address and the column address when reading from the frame memory 22 so as to read the column address in reverse order. As shown in FIG. 9A, when an image is not rotated, the row address is read in standard order from the left end of the row, and rows are read in standard order from the top row. On the other hand, as shown in FIG. 9B, when an image is rotated 90°, the column

address is read in reverse order from the bottom end of the column, and the columns are read in standard order from the top column. At this time, the rows and columns are also switched for the 32-bit code information P0~Pf within each 48-bit code data. That is, the lower 32-bit data within each address are read in the sequence Pc, P8, P4, P0, Pd, P9, P5, P1, Pe, Pa, P6, P2, Pf, Pb, P7, P3.

(4) Variable-length Code Expansion (fixed-length data conversion)

FIGS. 6 and 7 show the process of reading data (fixed-length compressed data, and fixed-length compressed data with variable-length encode compressed data) stored in frame memory 22, and generating fixed-length compressed data of 48-bits per 4x4 pixel block. This process reverse converts the variable-length encode compression process, i.e., is a variable-length encode expansion process.

The data of each color Y, M, C, Bk are read from frame memory 22 in sequence by a timing determined by the spacing between the image forming units of each color (L mm in the present example), and the data are first written to an input buffer.

When the fixed-length/variable-length switch signal CODESEL sent from the CPU is [0], data have been subjected to fixed-length compression and thereafter

subjected to variable-length compression, and the document size is A3 in the present example. In this case, the variable-length expansion process is executed in accordance with a fixed-length generation algorithm shown in the top frame of the lower level of FIG. 6.

That is, the process described below is executed to generate 48-bit data (new fixed-length compressed data) in accordance with an algorithm corresponding to the value of the 2-bit attribute information ATR read from the input buffer, and write these data to an output buffer.

(a) When the attribute information ATR is [00], 48-bit data are generated in which the average value index LA=00h, the gradient band index LD=0h, and the code information=0000h.

(b) When the attribute information ATR is [01], 48-bit data are generated in which the average value index LA=ffh, the gradient band index LD=0h, and the code information=0000h.

(c) When the attribute information ATR is [10], 48-bit data are generated in which the 8-bit data Flh from the 2-bit attribute information is designated the average value index LA, such that [LA=Flh], the gradient band index LD=0h, and the code information=0000h.

(d) When the attribute information ATR is [11], the 48-

bit data from the 2-bit attribute information are generated directly as new fixed-length compressed data.

On the other hand, when the fixed-length/variable-length switch signal CODESEL sent from the CPU is [1], data have been compressed only by fixed-length compression, and the document size is A4 in the present example. In this case, the data read from the input buffer are used to directly generate new fixed-length compressed data and stored in the output buffer, as shown in the bottom frame of the lower level of FIG. 6.

#### (5) Data Compression Effectiveness

FIG. 10 shows comparisons of the amount of data per color for A4 and A3 size images, and the amount of data at 400 and 600 dpi when such data are subjected to fixed-length compression only, and when subjected to variable-length compression after fixed-length compression.

As can be understood from comparing FIGS. 10(a) and 10(b) (or 10(c)), for an A3 size image, the amount of data can be reduced to less than 128 MB even at 600 dpi by subjecting the data to variable-length compression after fixed-length compression. That is, the data can be stored in the system of the present example constructed using two 64 MB DRAMs.

As can be further understood from comparing

FIGS. 10(a) and 10(b) (or 10(c)), for an A4 size image,  
the amount of data can be reduced to less than 64 MB at  
60 dpi by subjecting the data to variable-length  
compression after fixed-length compression, but since the  
5 amount of data is less than 128 MB even when only fixed-  
length compression is used, the system of the present  
example constructed using two 64 MB DRAMs is sufficient  
to store the data even without variable-length  
compression. Furthermore, by not using variable-length  
10 compression, the process effectively allows rotating of  
the image by controlling the readout address from the  
frame memory 22.

In the present invention, since image data  
compressed by a compression method in accordance with the  
15 image size are stored in memory, a relatively large  
amount of data according to image size can be stored in a  
relatively small memory, image formation can be  
accomplished at higher speed, color image formation can  
be accomplished at higher speed, and cost can be reduced.  
20 Furthermore, a compression method allowing image editing  
in a compressed state can be selected in accordance with  
image size.

Since fixed-length compression is selected  
below a predetermined size, editing processes such as  
25 rotation and the like can be readily performed in a

compressed state.

Although preferred embodiment(s) of the invention have been described in the foregoing detailed description and illustrated in the accompanying drawings,  
5 it will be understood that the invention is not limited to the embodiment(s) disclosed, but is capable of numerous rearrangements, modifications and substitutions of parts and elements without departing from the spirit of the invention. Accordingly, the present invention is  
10 intended to encompass such rearrangements, modification and substitutions of parts and elements as fall within the spirit and scope of the invention.



What is claimed is:

1. An image processing apparatus comprising:  
a memory for storing image data;  
a designating means for designating the image size;  
5 and

a compression system which compress the image data  
by a compression method corresponding to the image size  
designated with the designating means and send the  
compressed image data to the memory.

- 10 2. An apparatus according to claim 1, wherein said  
compression system include a first compression method  
which allows image editing in a compressed state and a  
second compression method which does not allow image  
editing in a compressed state.

- 15 3. An apparatus according to claim 2, wherein said  
first compression method is fixed-length compression  
method and said second compression method is variable-  
length compression method.

- 20 4. An apparatus according to claim 2, wherein said  
compression system selects a compression method for  
accomplishing a second compression method after a first  
compression method when a designated image size is larger  
than a specific size, and selects only a first  
compression method when a designated image size is  
25 smaller than the specific size.

5. An apparatus according to claim 1, wherein said image data are image data of four colors yellow, magenta, cyan, and black, and both compression and storage to memory are executed in parallel for each color.

5 6. An apparatus according to claim 1 further comprising:

an expansion system which expand the image data stored in the memory by a expansion method corresponding to the compression method which  
10 image size designated with the designating means and send the compressed image data to the memory.

7. An image processing apparatus comprising:

a memory for storing image data;

a designating means for designating the image size;

15 a compression system which includes a first compression method for first compressing the image data and a second compression method for second compressing the image data compressed by the first compression method; and

20 a controller which controls practice of the second compression method corresponding to the image size designated with the designating means.

8. An apparatus according to claim 7, wherein said first compression method is fixed-length compression

method and said second compression method is variable-length compression method.

9. An apparatus according to claim 7 further comprising:

5           a plural image forming unit which forms an image based on the image data stored in the memory.

10. An apparatus according to claim 9, wherein said memory stores the image data for delaying a output timing of the image data to the plural image forming unit.

10 11. An apparatus according to claim 7 further comprising:

          a paper supply unit which supplies sheet for image forming.

15 12. An apparatus according to claim 11, wherein said controller distinguish whether the paper supply unit will be able to supply a sheet according to the image size in a lengthwise direction and horizontal direction.

20 13. A method to image processing apparatus having a memory for storing image data, the method comprising the steps of:

          designating the image size of the image data;

          compressing the image data based on the designation of the designating step; and

          storing the image data to the memory.

14. A method according to claim 13, wherein said  
compressing step includes a first compression method for  
first compressing the image data and a second compression  
method for second compressing the image data compressed  
5 by the first compression method.

15. A method according to claim 13, wherein said  
compressing step includes fixed-length compression method  
and variable-length compression method.

## Abstract

An image processing apparatus for storing image data in a memory, reading image data stored in a memory, and generating print data, and is provided with a size  
5 designating means for designating an image size, and a memory control means for storing in memory the image data compressed by a compression method corresponding to a specified image size.

Fig.1A

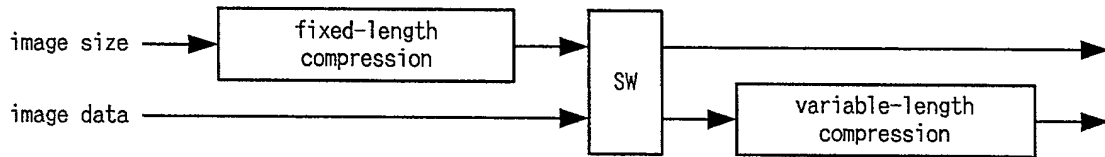


Fig.1B

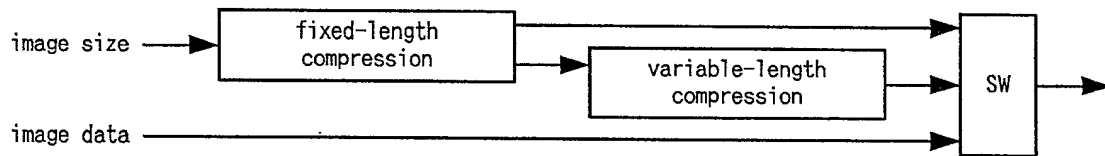


Fig.11

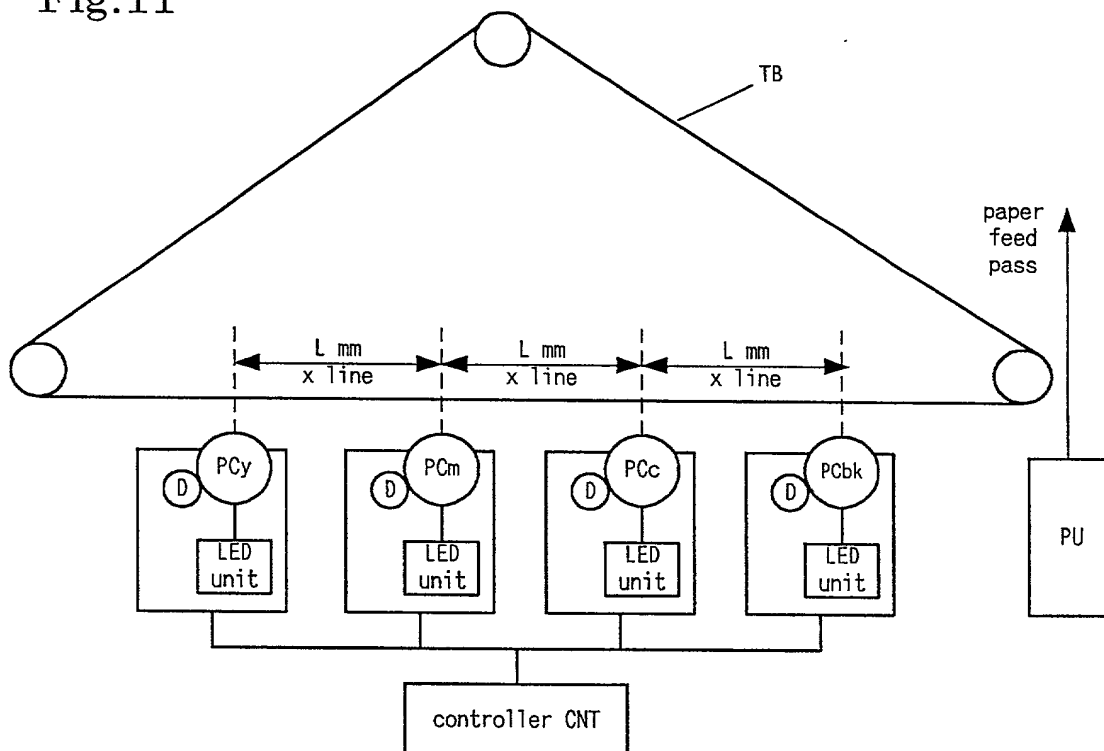


Fig.2

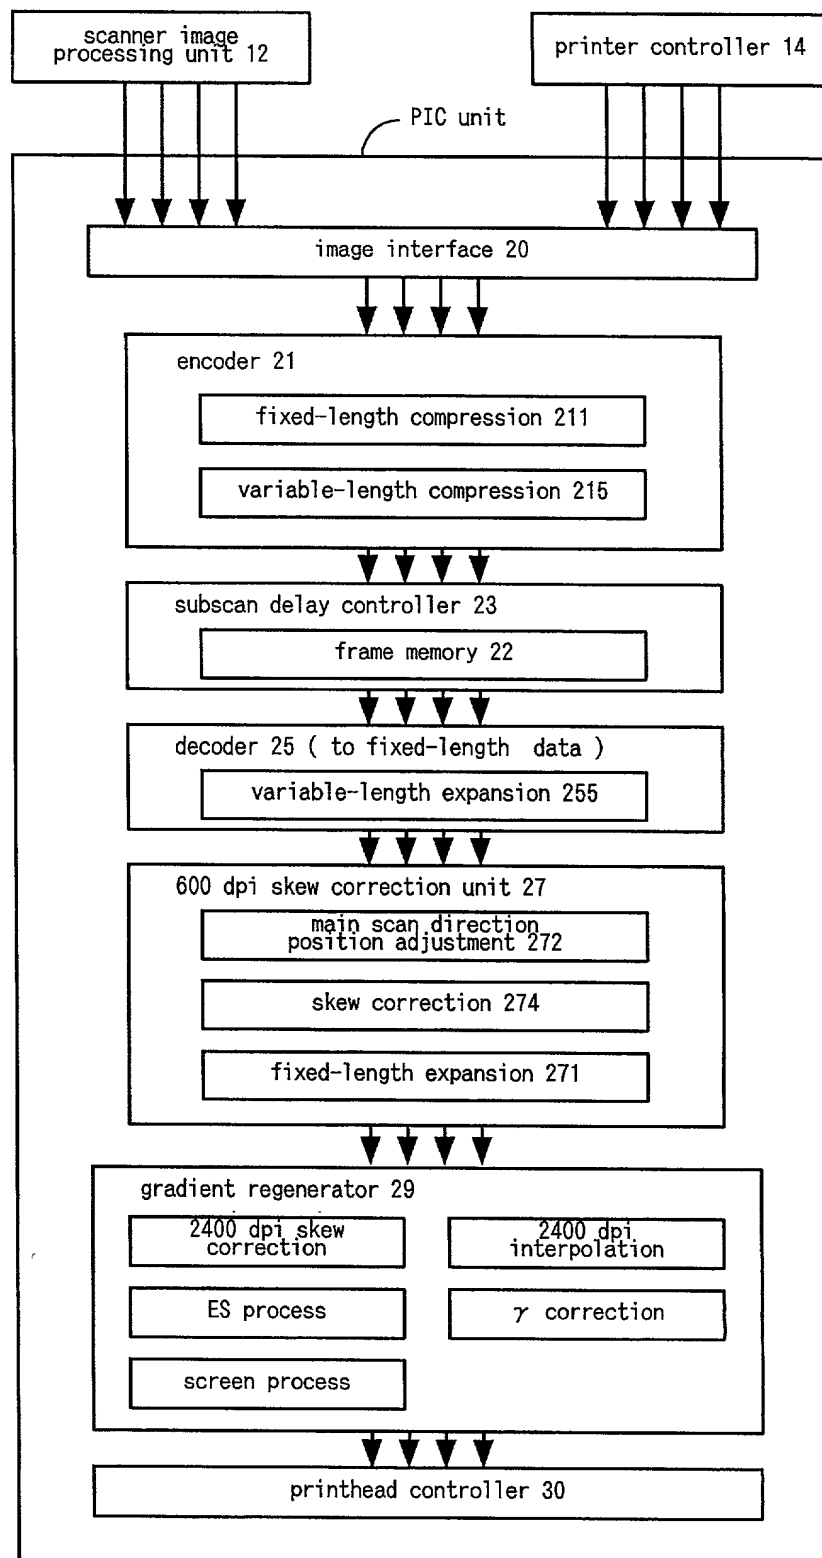


Fig. 3

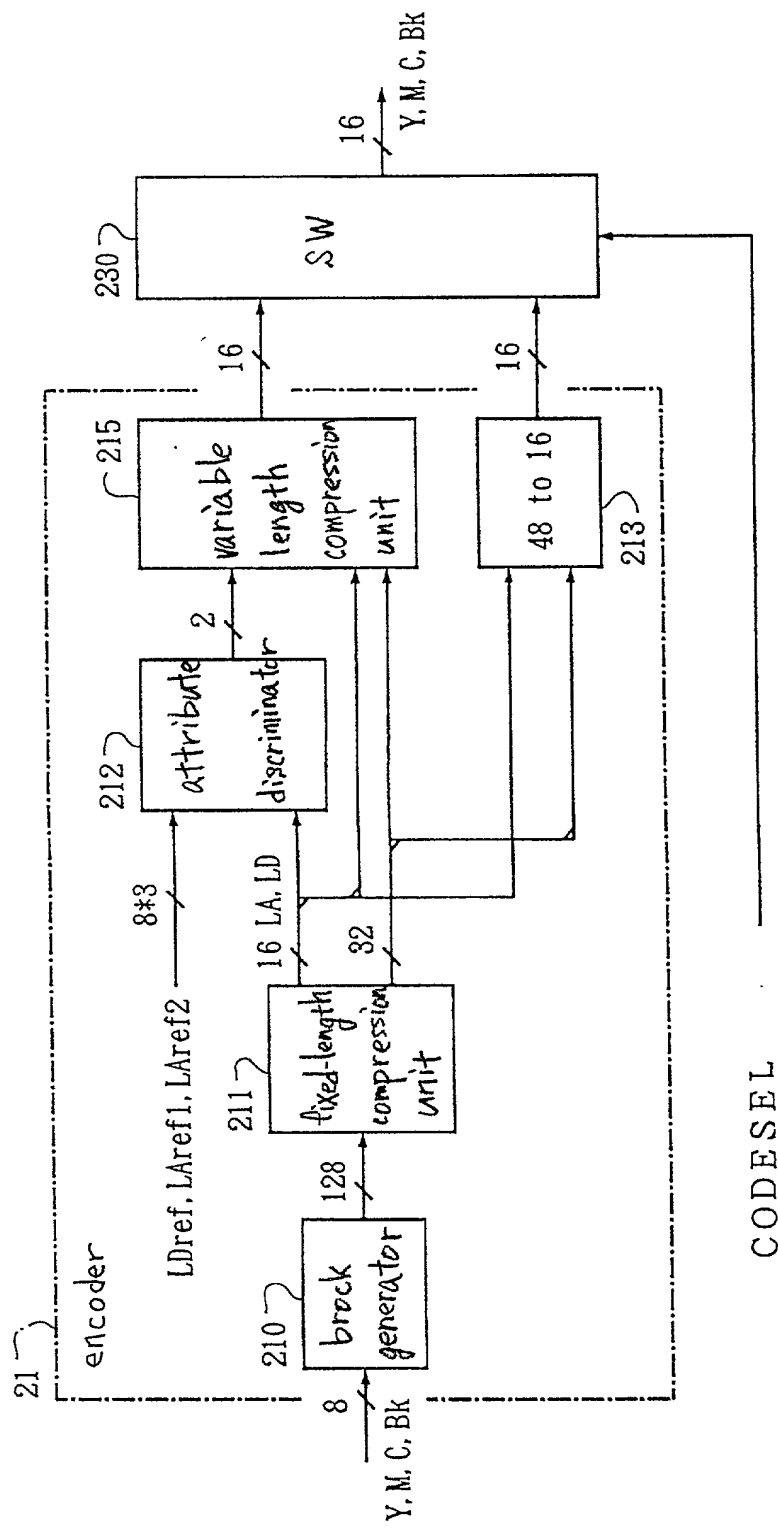




Fig. 4

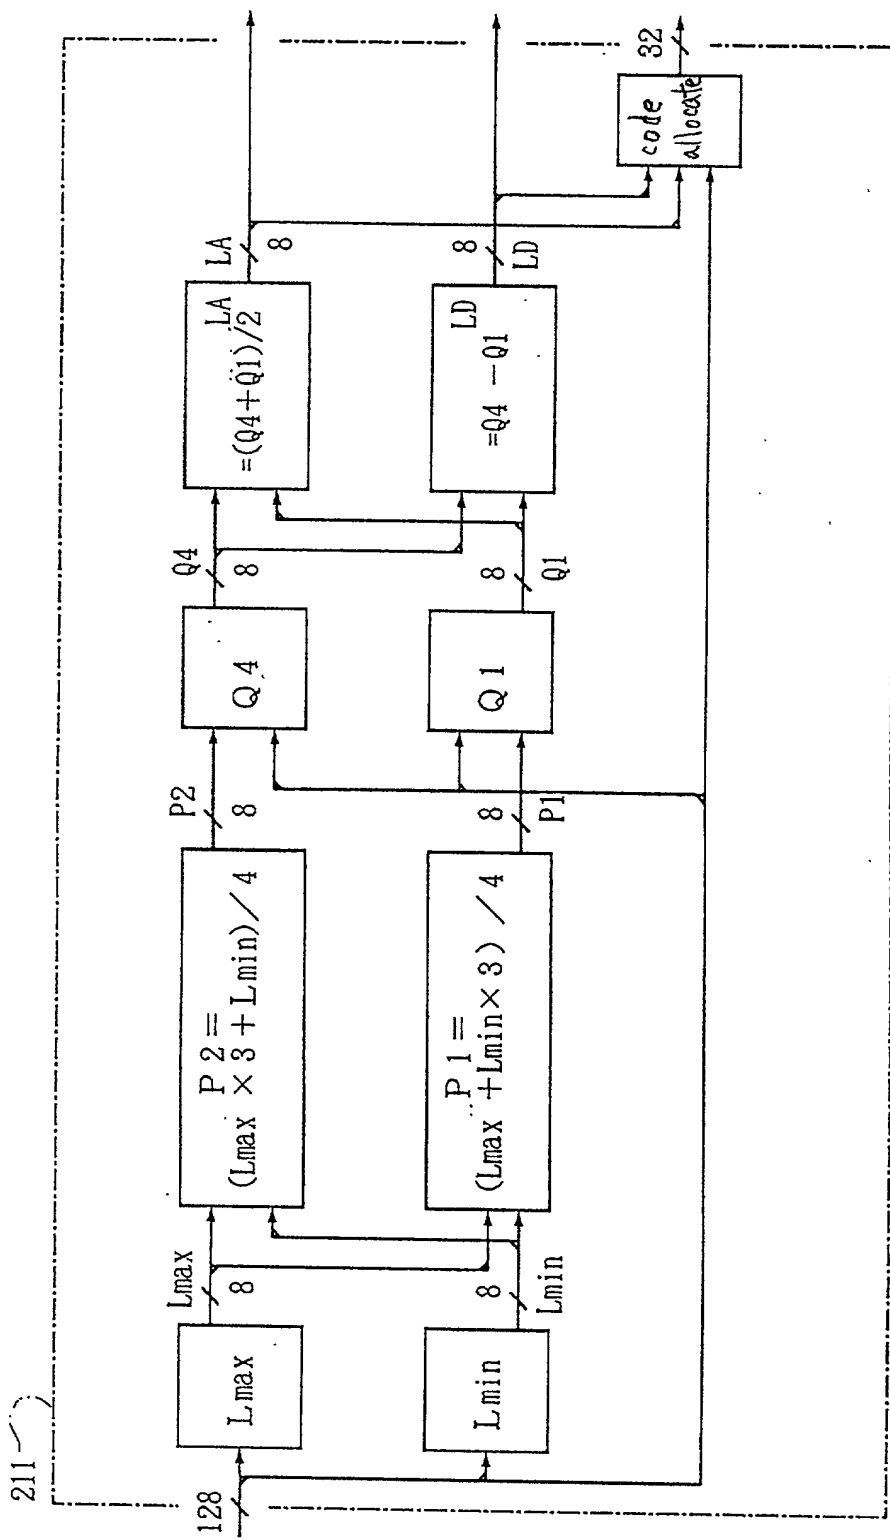


Fig. 5


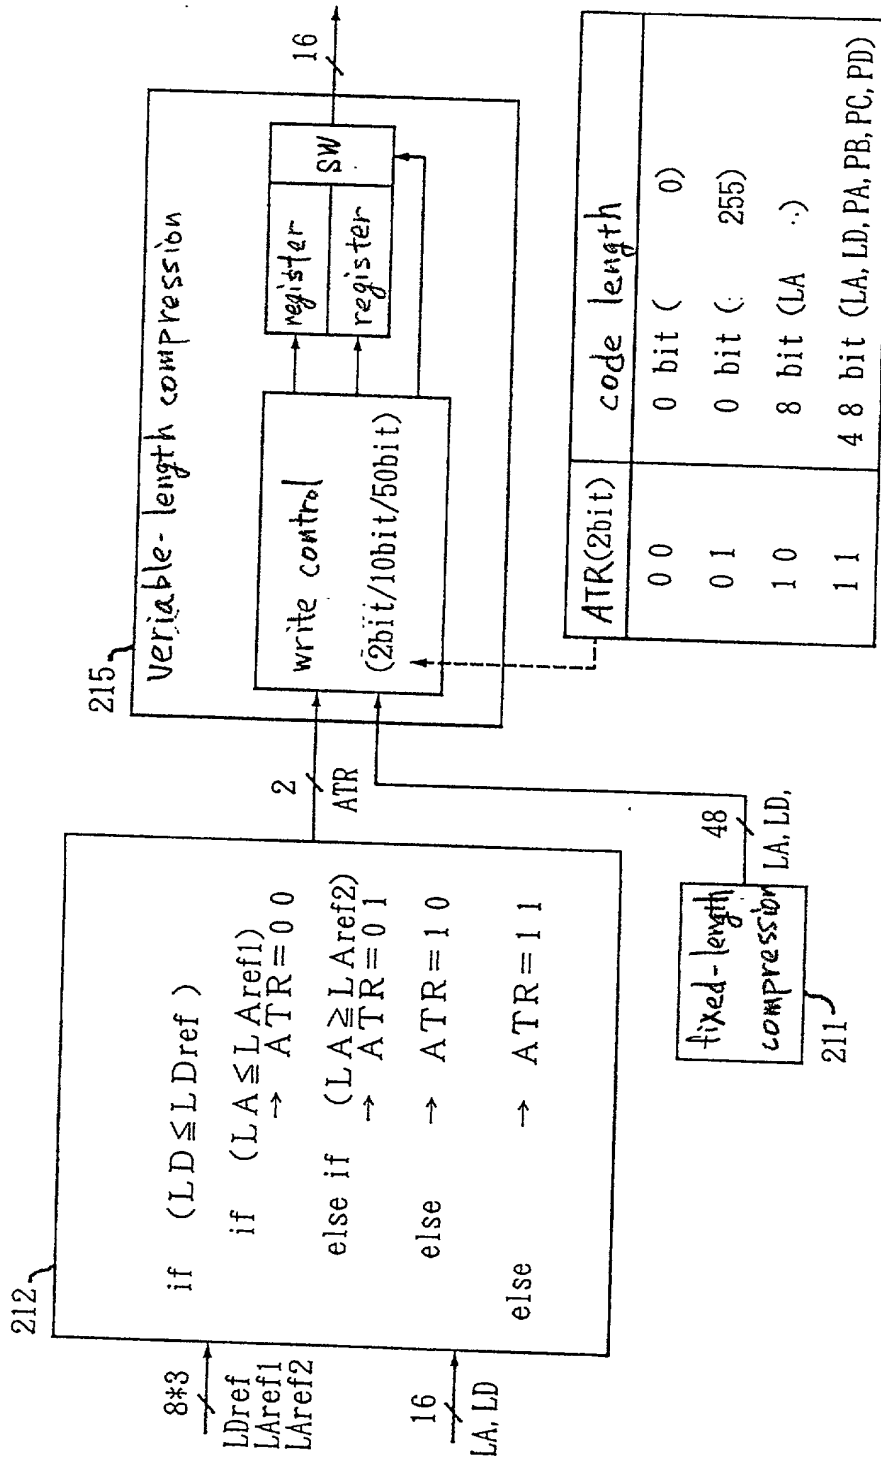


Fig. 6

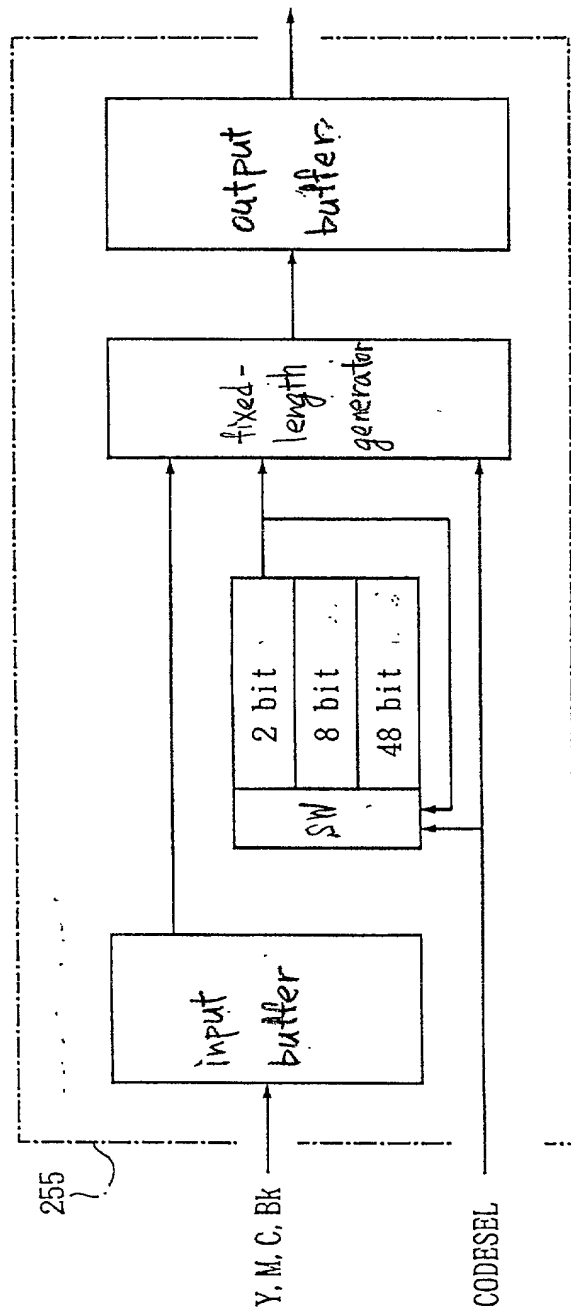

CODESEL	2 bit	read code length	(4 8 bit) LA, LD, PA, PB, PC, PD
1	(00) (01) (10) (11)	0bit 0bit 8bit(F1) 48bit(F1, F2, F3, F4, F5, F6)	(0, 0, 0, 0, 0, 0)h (ff, 0, 0, 0, 0, 0)h (F1, 0, 0, 0, 0, 0)h (F1, F2, F3, F4, F5, F6)h
0	—	48bit(F1, F2, F3, F4, F5, F6)	(F1, F2, F3, F4, F5, F6)h

Fig.7

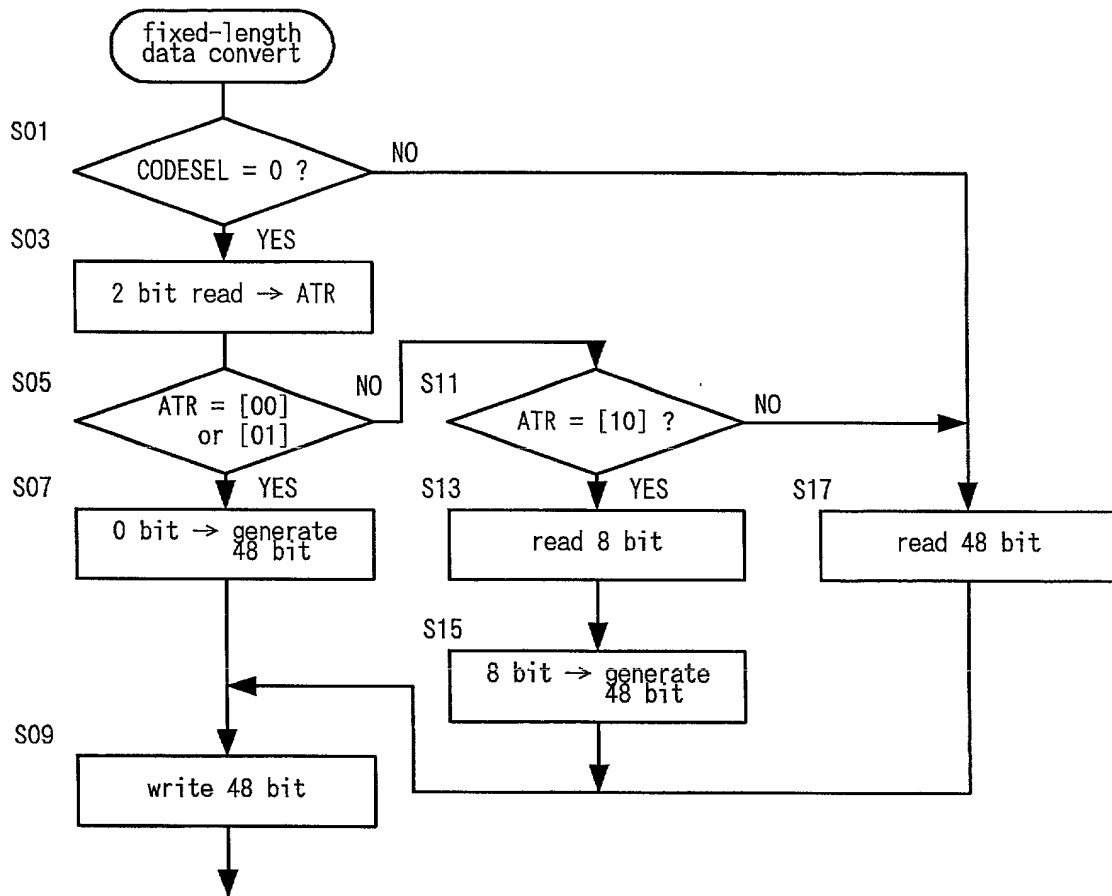


Fig. 8



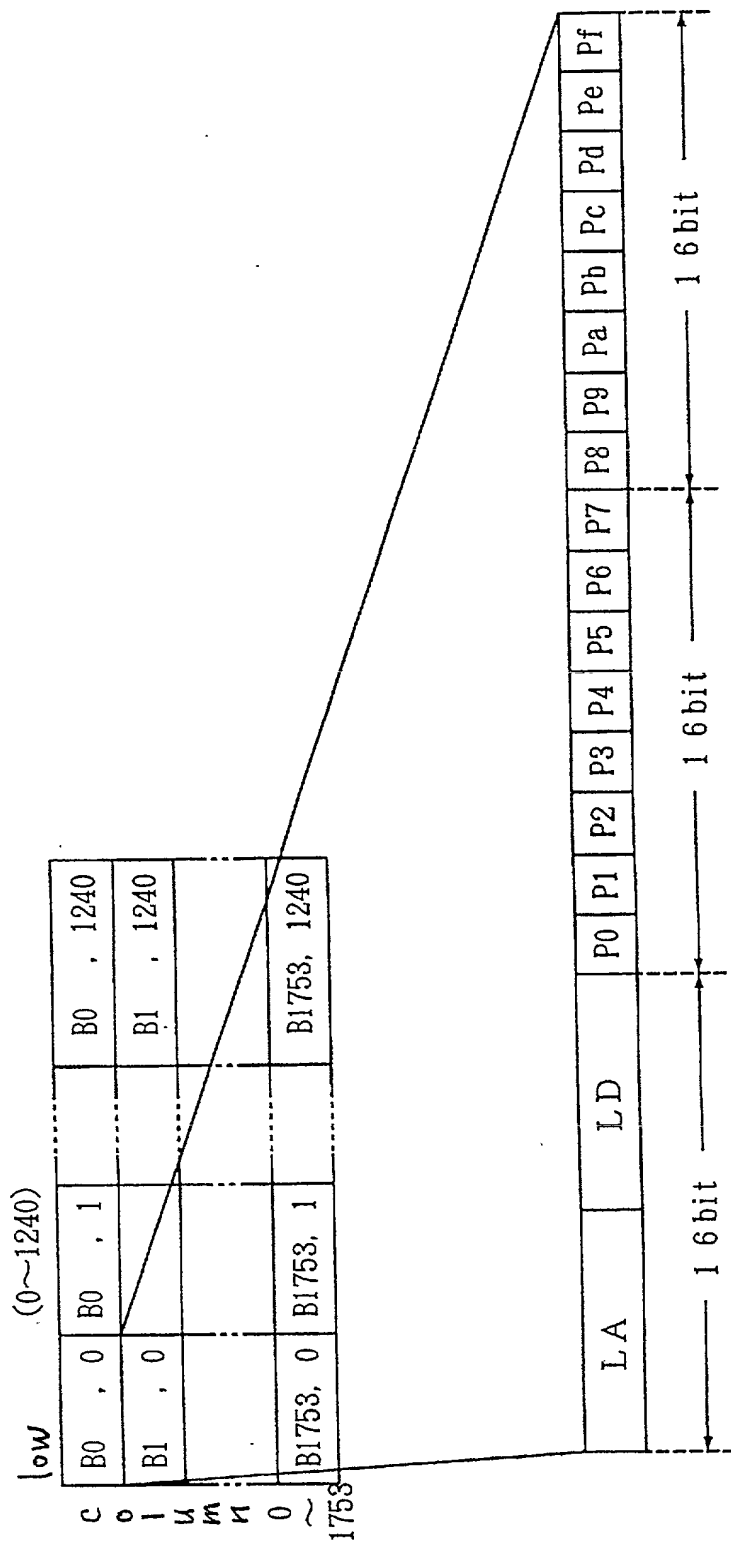


Fig. 9

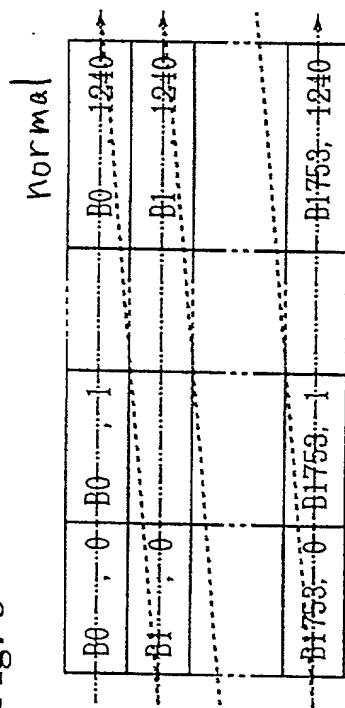

LA	LD	P0	P1	P2	P3	P4	P5	P6	P7	P8	P9	Pa	Pb	Pc	Pd	Pe	Pf
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

rotation (90°)

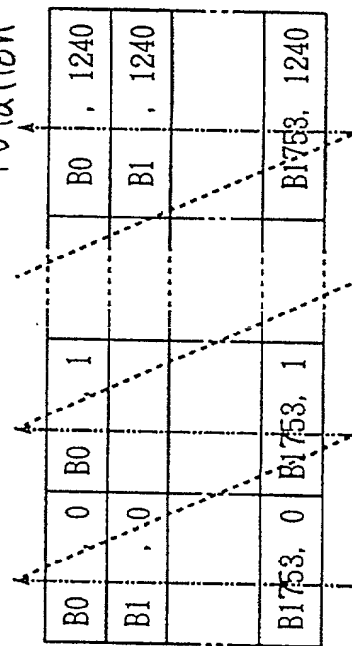

LA	LD	Pc	P8	P4	P0	Pd	P9	P5	P1	Pe	Pa	P6	P2	Pf	Pb	P7	P3
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Fig. 10

